


Calibre No. <h1 style="text-align: center;">4302A</h1>	Jewels <h1 style="text-align: center;">2j</h1>	Style Name
--	--	-------------------



Characteristics

Casing diameter : 18.00 ϕ mm
 Maximum height : 4.11 mm
 Frequency of quartz crystal oscillator : 32,768 Hz
 (Hz=Hertz Cycle per second)
 Driving system : Step motor system (2 poles)
 Regulation system : Trimmer condenser
 Second-setting device
 Calendar (date)
 Instant date setting

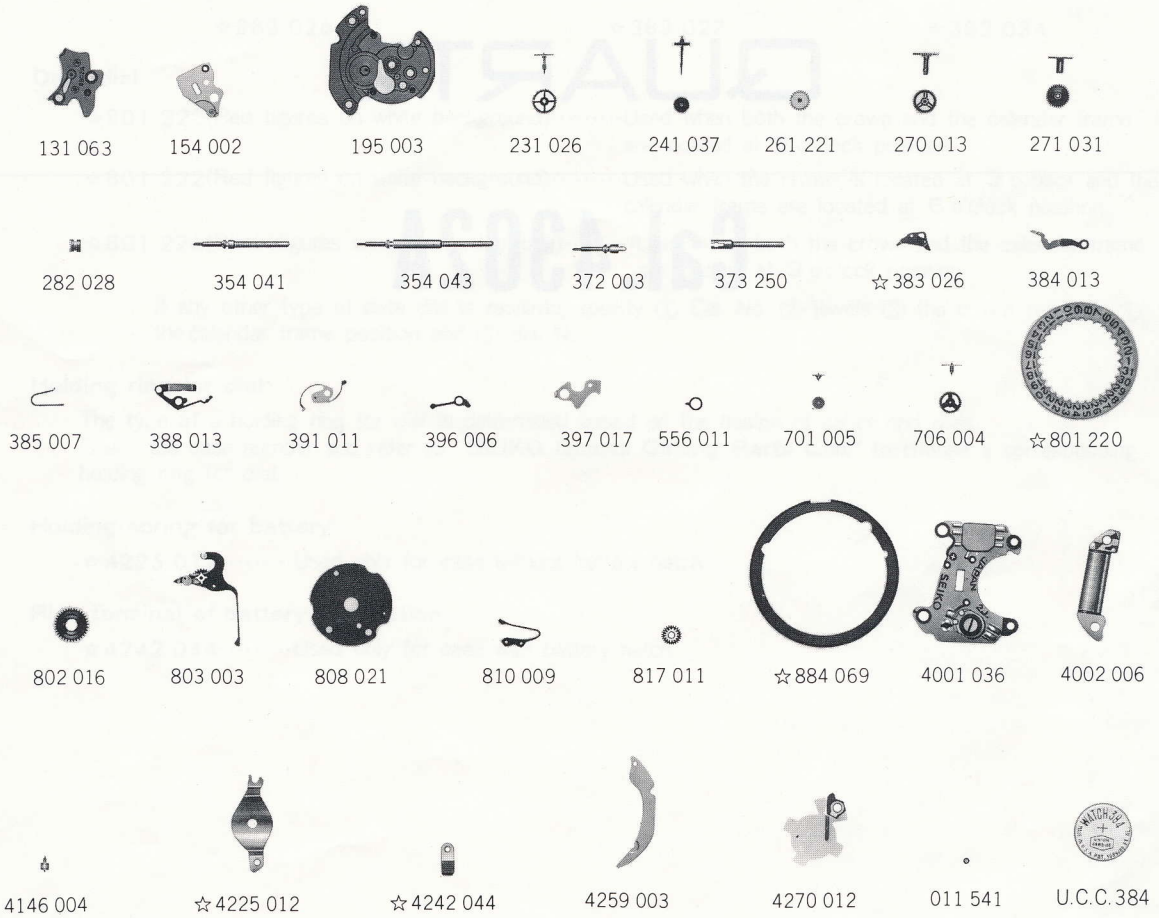

012 354	012 417	012 443	012 444	012 448	012 752	012 774	012 775	012 923	017 074
017 076	017 079	017 503	017 714	017 924					2/1

Calibre No.		Jewels	Style Name	
4302A		2j		
PART NO.	PART NAME	PART NO.	PART NAME	
131 063	Third wheel bridge			
154 002	Fifth wheel bridge			
195 003	Calendar plate			
231 026	Third wheel & pinion			
241 037	Fourth wheel & pinion			
261 221	Minute wheel			
270 013	Center minute wheel			
271 031	Hour wheel			
282 028	Clutch wheel			
354 041	Winding stem (12.89mm)			
354 043	Winding stem (17.89mm)			
372 003	Joint stem (movement portion)			
373 250	Joint stem (case portion)			
☆ 383 026	Setting lever			
☆ 383 027				
☆ 383 034				
384 013	Yoke (Clutch lever)			
385 007	Yoke spring (Clutch lever spring)			
388 013	Setting lever spring			
391 011	Second setting lever			
396 006	Friction spring for fourth wheel & pinion			
397 017	Lever for unlocking stem			
556 011	Date finger			
701 005	Fifth wheel			
706 004	Sixth wheel & pinion			
☆ 801 220	Date dial			
☆ 801 222				
☆ 801 226				
802 016	Date driving wheel			
803 003	Setting wheel lever complete			
808 021	Date dial guard			
810 009	Date jumper			
817 011	Intermediate date wheel			
☆ 884 069	Holding ring for dial			
4001 036	Circuit block			
4002 006	Coil block			
4146 004	Step rotor			
☆ 4225 012	Holding spring for battery			
☆ 4242 044	Plus terminal of battery connection			
4259 003	Back plate (anti-magnetic)			
4270 012	Battery connection			
011 541	Upper hole jewel for step rotor			
011 541	Lower hole jewel for step rotor			
012 354	Setting lever spring screw			
012 417	Third wheel bridge screw			
012 443	Circuit block screw A			
012 444	Calendar plate screw			
012 448	Back plate (anti-magnetic) screw			
012 752	Fifth wheel bridge screw			
012 774	Date dial guard screw			
012 775	Circuit block screw B			
012 923	Stopper screw for third wheel bridge			
017 074	Stopper tube for circuit block			
017 076	Tube for circuit block screw A			
017 079	Tube for circuit block screw B			
017 503	Spacer for circuit block			
017 714	Lower bush for fifth wheel			
017 924	Eccentric dial pin			
U.C.C. 384	Silver oxide battery			

☆⇒ Please see remarks on the reverse page.
Part numbers in light letters are not shown in photos.

Calibre No.

4302A

Jewels

2j

Style Name

Remarks :


Setting lever

☆383 026, 383 027, 383 034.....There are three types of setting levers. Select the suitable setting lever by referring to the shapes in the lower diagram.


If the combination of the setting lever and case is unknown, check the case number and refer to "SEIKO Quartz Casing Parts List" to choose a corresponding setting lever.



☆383 026



☆383 027



☆383 034

Date dial

☆801 220(Red figures on white background).....Used when both the crown and the calendar frame are located at 3 o'clock position.

☆801 222(Red figures on white background).....Used when the crown is located at 3 o'clock and the calendar frame are located at 6 o'clock position.

☆801 226(Black figures on white background).....Used when both the crown and the calendar frame are located at 3 o'clock position.

If any other type of date dial is required, specify ① Cal. No. ② jewels ③ the crown position ④ the calendar frame position and ⑤ dial No.

Holding ring for dial

The type of a holding ring for dial is determined based on the design of cases and dials.

Check the case number and refer to "SEIKO Quartz Casing Parts List" to choose a corresponding holding ring for dial.

Holding spring for battery

☆4225 012.....Used only for case without battery hatch.

Plus terminal of battery connection

☆4242 044.....Used only for case with battery hatch.