


Catalog No. 402-1~402-2
403-1~403-2

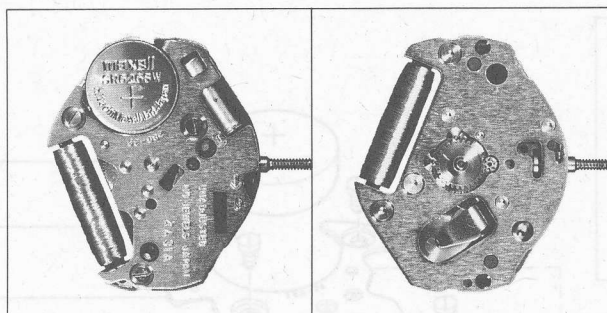

**402-1
403-1**
(Catalog No.)

**402-2
403-2**
(Catalog No.)

4031A

- Quartz crystal oscillator type
- With a center second hand
- Power saving switch
- Second hand stopping at optional position

Thickness: 2.7mm^t

4021A

- Quartz crystal oscillator type
- Without second hand
- Power saving switch

Thickness: 2.7mm^t


Size

15.3 x 17.8mm

Oscillation per second

32,768Hz

* The spacer for train wheel bridge is available in two types. Which-ever is used, there will be no problem, and in addition, both may be mounted upside down.

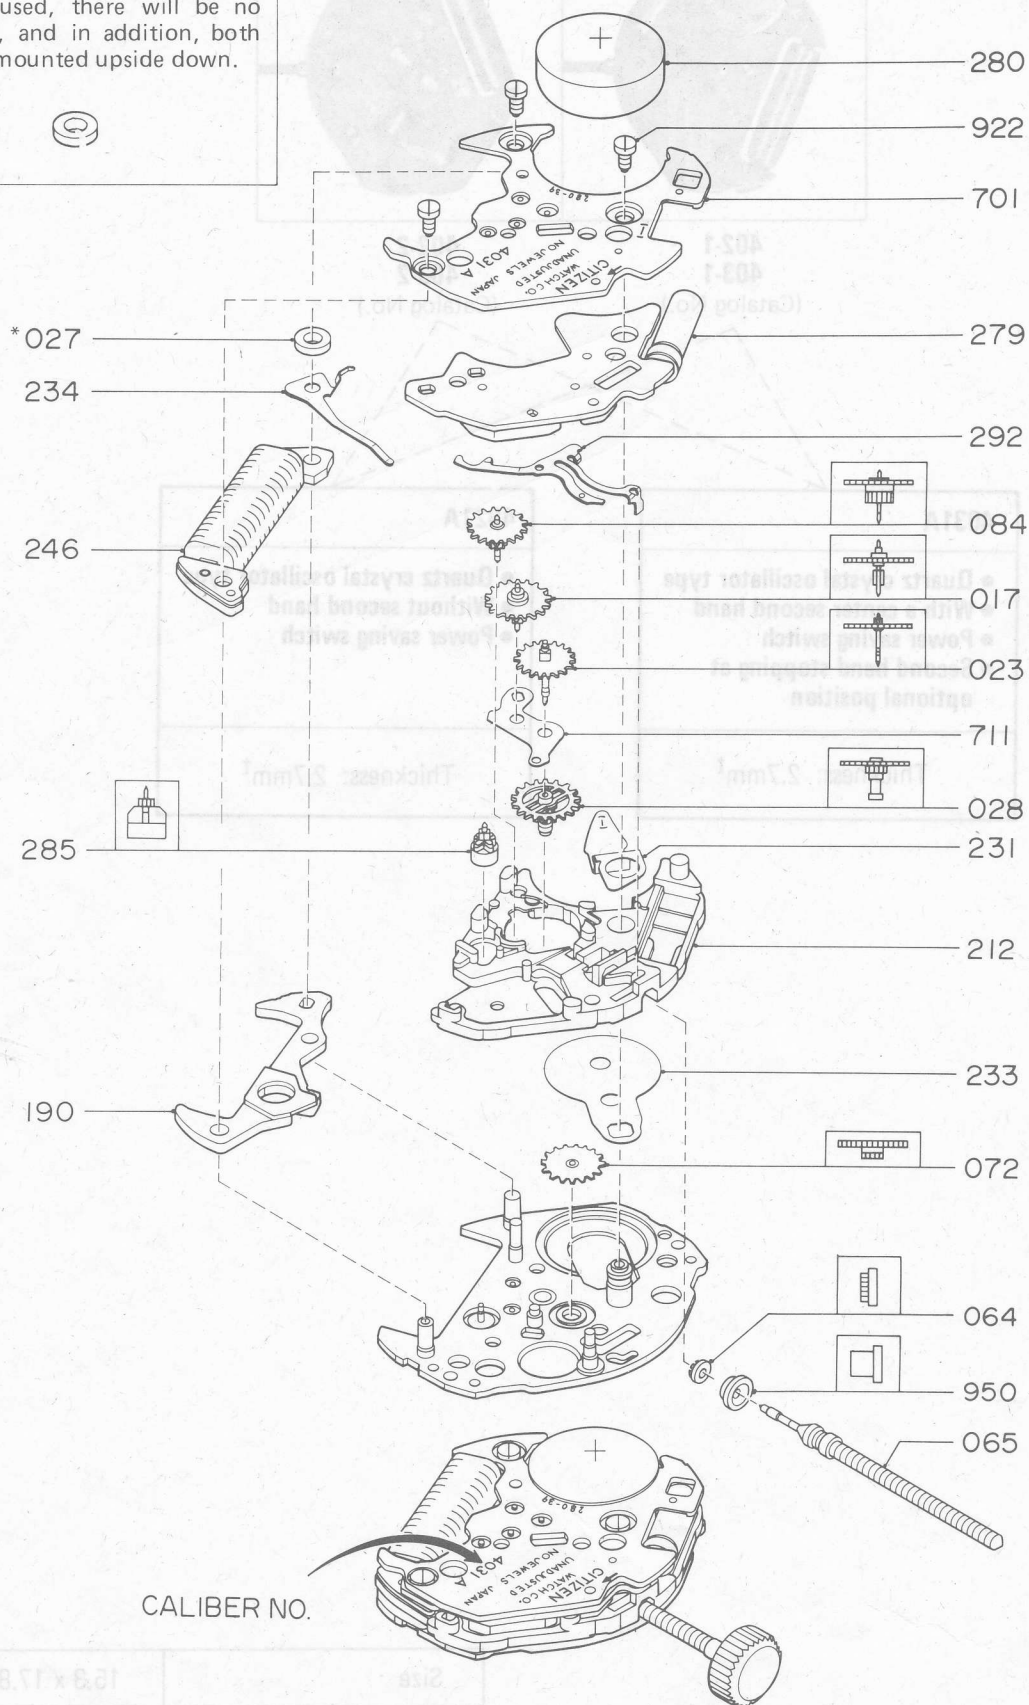

CALIBER NO.

Catalog No. 402-1
403-1

[illegible]

