




Calibre No. 37A	Jewels 16j	Style Name
---	--	-------------------

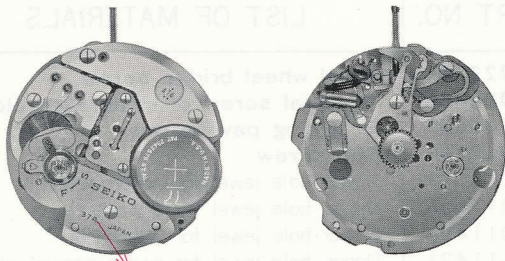

Cal. 37A

Characteristics

Electronic watch
 (Non-contact points balance driven system)
 Casing diameter : 29.00 ϕ mm
 Maximum height : 6.00 mm
 Vibrations per hour : 21,600
 Sweep second
 Second-setting device (Power supply switch)
 "Diashock" Shock Resistant Device

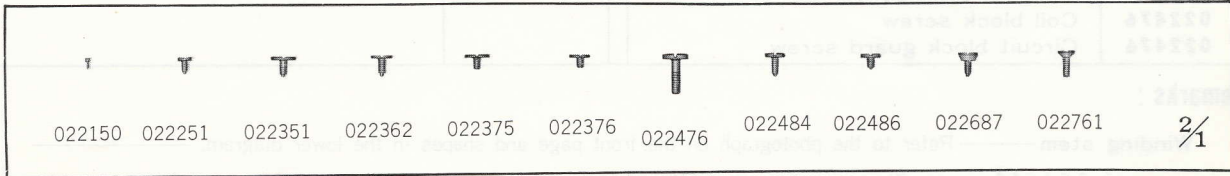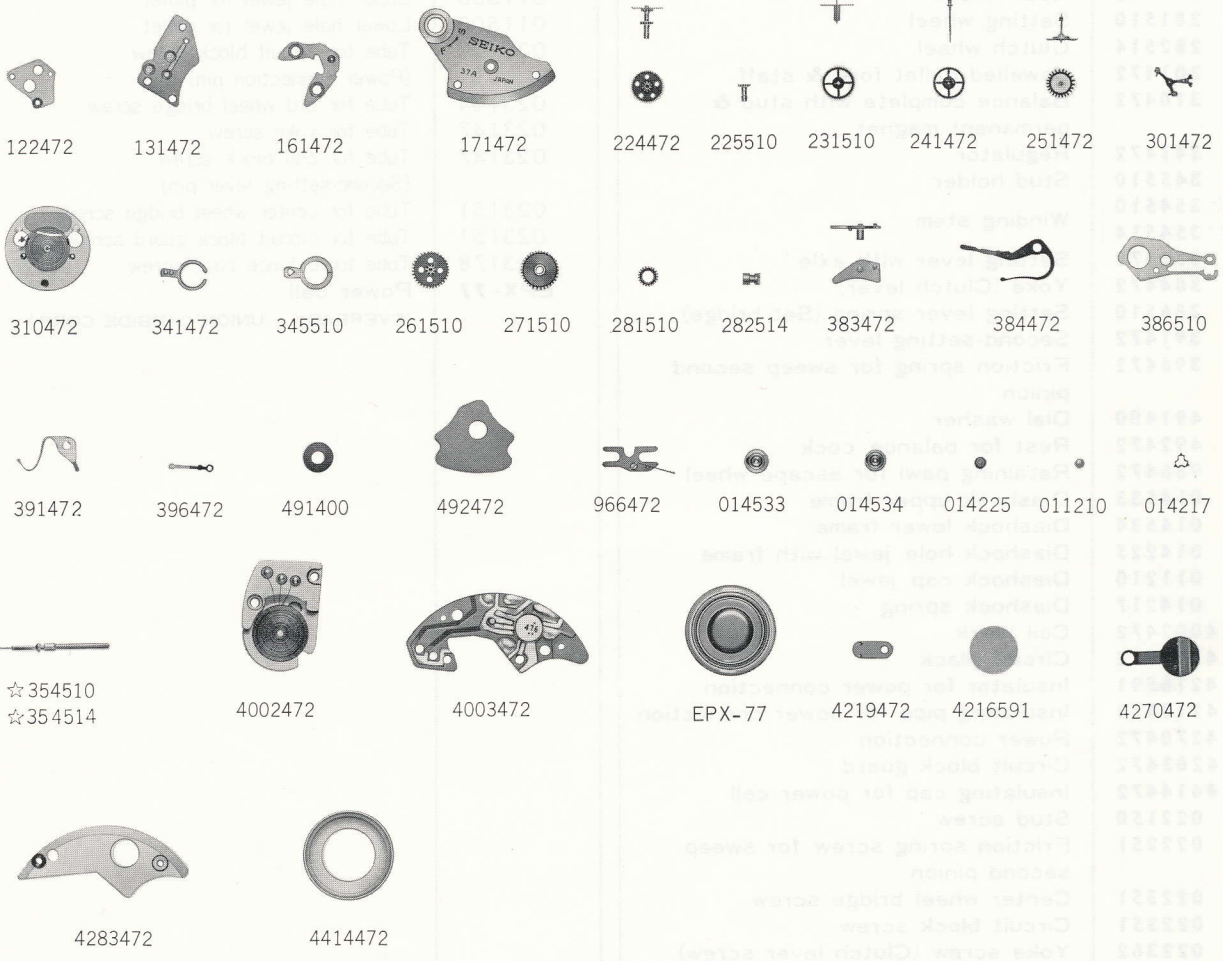

Calibre No. 37A	Jewels 16j	Style Name
--------------------------------------	---------------------------------	-------------------

PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
122472	Center wheel bridge	022484	Third wheel bridge screw
131472	Third wheel bridge	022486	Terminal screw of integrated block
161472	Pallet cock	022687	Retaining pawl screw
171472	Balance cock	022761	Dial screw
224472	Center wheel & pinion with cannon pinion	011117	Lower hole jewel for center wheel
225510	Cannon pinion	011406	Upper hole jewel for 3rd wheel
231510	Third wheel & pinion	011406	Lower hole jewel for 3rd wheel
241472	Sweep second wheel & pinion	011421	Upper hole jewel for sweep second wheel
251472	Escape wheel & pinion	011719	Lower hole jewel for sweep second wheel
261510	Minute wheel	011405	Upper hole jewel for escape wheel
271510	Hour wheel	011405	Lower hole jewel for escape wheel
281510	Setting wheel	011503	Upper hole jewel for pallet
282514	Clutch wheel	011503	Lower hole jewel for pallet
301472	Jewelled pallet fork & staff	023103	Tube for circuit block screw (Power connection pin)
310472	Balance complete with stud & permanent magnet	023104	Tube for 3rd wheel bridge screw
341472	Regulator	023147	Tube for yoke screw
345510	Stud holder	023147	Tube for coil block screw (Second-setting lever pin)
☆ 354510	Winding stem	023151	Tube for center wheel bridge screw
☆ 354514		023151	Tube for circuit block guard screw
383472	Setting lever with axle	023178	Tube for balance cock screw
384472	Yoke (Clutch lever)	EPX-77	Power cell
386510	Setting lever spring (Set bridge)		(EVEREADY — UNION CARBIDE CORP.)
391472	Second-setting lever		
396472	Friction spring for sweep second pinion		
491400	Dial washer		
492472	Rest for balance cock		
966472	Retaining pawl for escape wheel		
014533	Diashock upper frame		
014534	Diashock lower frame		
014225	Diashock hole jewel with frame		
011210	Diashock cap jewel		
014217	Diashock spring		
4002472	Coil block		
4003472	Circuit block		
4216591	Insulator for power connection		
4219472	Insulating pipe for power connection		
4270472	Power connection		
4283472	Circuit block guard		
4414472	Insulating cap for power cell		
022150	Stud screw		
022251	Friction spring screw for sweep second pinion		
022351	Center wheel bridge screw		
022351	Circuit block screw		
022362	Yoke screw (Clutch lever screw)		
022375	Setting lever spring screw		
022376	Pallet cock screw		
022476	Balance cock screw		
022476	Coil block screw		
022476	Circuit block guard screw		

Remarks :

Winding stem ——— Refer to the photograph on the front page and shapes in the lower diagram. ———

☆ 354510..... Short winding stem (Thread is provided completely on the crown portion.)

☆ 354514..... Long winding stem (Thread is provided only on the end of the crown portion.)



☆ 354510



☆ 354514

☆ ⇨ Please see remarks.

Items in light letters are not shown in photos.