


ELECTROPLATING EQUIPMENT

For plating Gold, Rhodium, Silver, Nickel, Copper & other metals

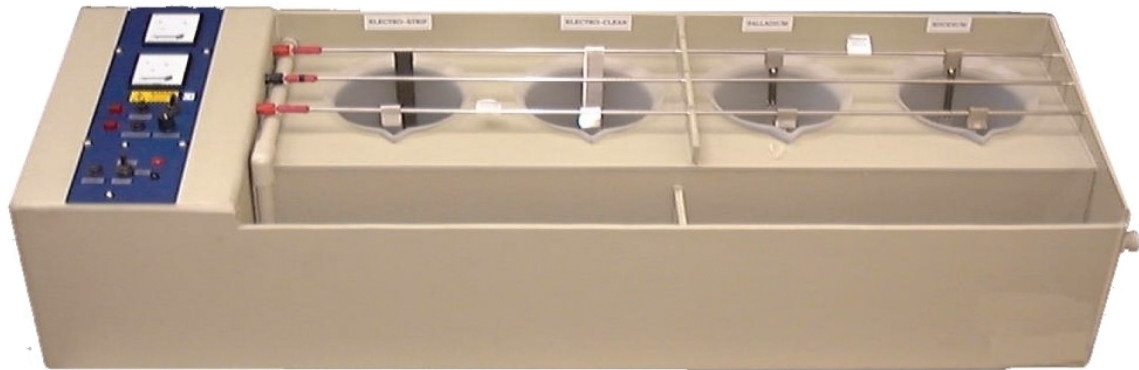

GRS RANGE

Compact, self contained and easy to install
2, 3 and 4 tank models (illustrated)

- ☞ Completely integrated unit.
- ☞ Automatic heating, adjustable 20 - 80°C.
- ☞ 0 - 10 volt, 20 amp power supply, heavy duty rated.
- ☞ 2 and 5 litre polypropylene process tanks.
- ☞ Platinised Titanium and Stainless steel anodes.
- ☞ Corrosion resistant case and lids.
- ☞ Integral rinse tanks fitted.
- ☞ Fitted with horizontal cathode rod movement.
- ☞ Supplied with full instructions.

SPECIFICATIONS

- 2 tank 2 litre model: Size 68 wide x 30 high x 42 cms deep. 110 and 220/240 volt models
7.5 amperes. Nett weight 12 Kg. Number 2488D-2
- 3 tank 2 litre model: Size 90 wide x 30 high x 42 cms deep. 110 and 220/240 volt models
13 amperes. Nett weight 14 Kg. Number 2488D
- 4 tank 2 litre model: Size 120 wide x 30 high x 42 cms deep. 110 and 220/240 volt models
13 amperes. Nett weight 16 Kg. Number 2489D
- 2 tank 5 litre model: Size 90 wide x 40 high x 52 cms deep. 110 and 220/240 volt models
7.5 amperes. Nett weight 13 Kg. Number 2466D-2
- 3 tank 5 litre model: Size 110 wide x 40 high x 52 cms deep. 110 and 220/240 volt models
13 amperes. Nett weight 15 Kg. Number 2466D
- 4 tank 5 litre model: Size 150 wide x 40 high x 52 cms deep. 110 and 220/240 volt models
13 amperes. Nett weight 15 Kg. Number 2464D



DS 27