

# CLASSIC GREASE 8212

Classic grease for micromechanics



## Description

Soft lubricant (Glissalube B) with red color. The vegetable oils used as an additive give it a good lubricating power. Developed for the lubrication of barrel drums, it provides moderate braking.

Especially recommended for aluminum barrel walls.



## Technical features (indicative values)

<b>Appearance</b>	Red
<b>Penetration</b>	185 1/10 mm
<b>Drop point</b>	102 °C
<hr/>	
<b>Base oil</b>	Mineral
<b>Viscosity at 20°C</b>	200 cSt
<b>Refraction index at 20 °C</b>	1.477
<b>Pour point</b>	-10 °C
<b>Acidity</b>	0.5 mg KOH / g


<b>Unctuousness / Lubricity</b>	
<b>Viscosity / Texture</b>	
<b>Ageing resistance / Stability</b>	
<b>Adhesion / Grip</b>	
<b>Compatibility</b>	Metals and et certain polymers
<b>Application</b>	Barrel wall
<b>Shelf life</b>	3 years
<b>Temperature range</b>	-40 °C to +80 °C

## Application fields

### Classic grease to be used for :

- Precision micromechanics (watch, timer, measuring device , tools, ...)
- Instrumentation and counters (automotive, aeronautic, naval,...)
- Micro motors and stepper motors
- General mechanics (office equipment, fans,...)
- Ball bearings, parts of mechanisms
- Lubrication of the barrel wall

## Radar chart

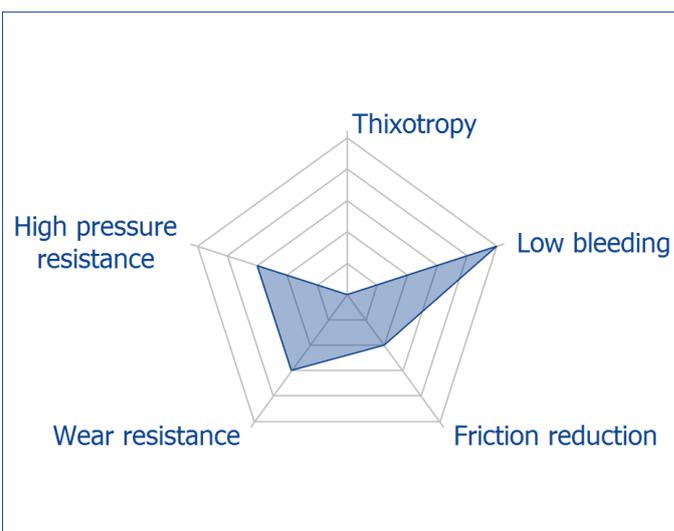

## Storage

We advise keeping Moebius products in their original packaging in a clean and dry place, protected from light, ideally at a temperature of 15 to 26 °C.

After opening we recommend keeping the products for a maximum of 12 months.

