

FABRIQUE D'ÉBAUCHES


# RONDA S.A. 4415 LAUSEN

(SUISSE)

6¾-8'''

# 5001

Cal. 5001 6¾-8''' sans seconde  
without second

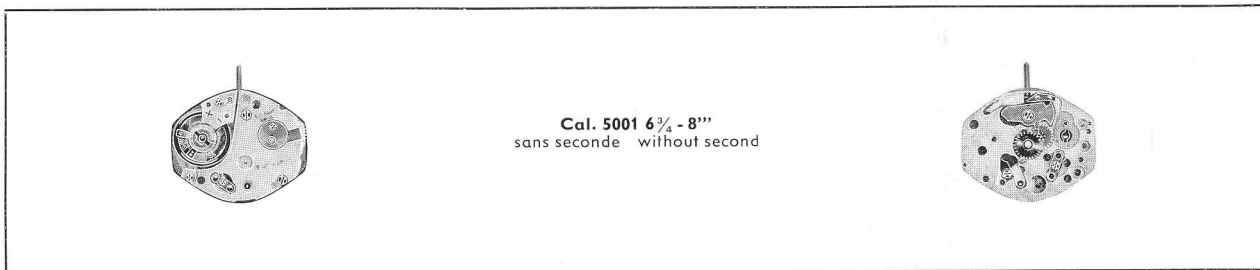

Cal. 5001 6¾-8'''  
sans seconde without second

### Caractéristiques techniques (1/100 mm)

Cal. 5001 6¾-8'''

#### Cage:

Diamètre total 1820  
Diamètre encadrement 1780  
Hauteur maximum 396

#### Ressort de barillet:

Hauteur 180  
Épaisseur 7,25-7,5  
Longueur 280 mm

#### Balancier:

Diamètre total 730  
Diamètre du trou 45  
Hauteur serge 43

#### Virole:

Diamètre total 110  
Diamètre du trou 43  
Hauteur 50

#### Aiguillage:

Diamètre ajustement d'aiguille minute 60  
Diamètre ajustement d'aiguille heure 120

### Technical characteristics (1/100 mm)

Cal. 5001 6¾-8'''

#### Cage:

Total diameter 1820  
Casing diameter 1780  
Total height 396

#### Mainspring:

Height 180  
Thickness 7,25-7,5  
Length 280 mm

#### Balance:

Total diameter 730  
Diameter of hole 45  
Height of wheel 43

#### Collet:


Total diameter 110  
Diameter of hole 43  
Height 50

#### Hands:


Diameter adjustment of minute hand 60  
Diameter adjustment of hour hand 120

# Cal. 5001 6<sup>3</sup>/<sub>4</sub>-8'''

sans seconde / without second




100 106 121 125 770



165 185 195 201/1 210 227



243 245 250 260 307 334/1 334/2



364 401 411 416 421 425 430



437 439 443 445 451 630/8 631/8



790 792 792/1 793 793/1 797 799



5105 5125 5334 5425 5437 5437 S 5443 5750

No	Description
100	Platine
106	¾ platine
121	Coq
125	Pont d'ancre
770	Ressort de barillet
165	Plaque de barillet
185	Tambour de barillet
195	Arbre de barillet
201/1	Grande moyenne
210	Petite moyenne
227	Roue de seconde
243	Chaussée No 1
245	Chaussée No 2
250	Canon
260	Minuterie
307	Raquette
334/1	Plaque contre-pivot dessous
334/2	Plaque contre-pivot dessus
364	Porte-piton
401	Tige de remontoir
411	Pignon de remontoir
416	Rochet
421	Couronne
425	Masse
430	Ressort de masse
437	Bascule
439	Ressort de bascule
443	Tirette
445	Sautoir
451	Renvoi de minuterie
630/8	Coquetet dessus
631/8	Coquetet dessous
790	Roue d'échappement
792	Axe de balancier
792/1	Axe de balancier flexible
793	Balancier réglé
793/1	Balancier réglé flexible
797	Fourchette
799	Plateau

### Vis de:

5105	Pont
5125	Pont d'ancre
5334	Plaque contre-pivot
5425	Masse
5437	Bascule sans sautoir
5437 S	Bascule avec sautoir
5443	Tirette
5750	Cadran

### No. Description

100	Plate
106	¾-plate
121	Cock
125	Lever bridge
770	Mainspring
165	Barrel plate
185	Barrel drum
195	Barrel arbor
201/1	Center wheel
210	Third wheel
227	Fourth wheel
243	Cannon pinion No. 1
245	Cannon pinion No. 2
250	Hour wheel
260	Minuterie wheel
307	Regulator
334-1	Lower end-piece
334-2	Upper end-piece
364	Stud holder
401	Winding stem
411	Winding pinion
416	Ratchet wheel
421	Crown wheel
425	Click
430	Click spring
437	Yoke
439	Yoke spring
443	Setting piece
445	Setting lever spring
451	Setting wheel
630/8	Upper cap jewel with end-piece for balance
631/8	Lower cap jewel with end-piece for balance
790	Pin escape wheel
792	Balance staff
792-1	Staff for flexible balance
793	Balance regulated
793-1	Flexible balance regulated
797	Pin pallet fork
799	Roller

### Screw for:

5105	Bridge
5125	Lever bridge
5334	End-piece
5437	Yoke for setting lever spring
5437 S	Yoke without setting lever spring
5443	Setting piece
5750	Dial
5425	Click