











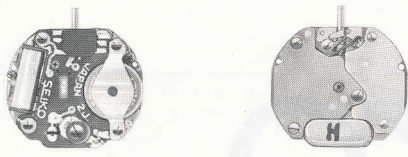

































Calibre No. 43A	Jewels 2j	Style Name
---------------------------	---------------------	------------

	Characteristics Casing diameter : 18.00 ϕ mm Maximum height : 3.58 mm Frequency of quartz crystal oscillator : 32,768 Hz (Hz=Hertz Cycle per second) Driving system : Step motor system (2 poles) Regulation system : Trimmer condenser
---	---

 131 060	 154 002	 ☆ 194 004	 231 026	 241 032	 261 221	 270 005	 271 028
 281 009	 282 028	 354 042	 354 044	 372 004	 373 250	 ☆ 383 028	
 ☆ 383 029	 384 014	 385 007	 388 014	 391 011	 397 017	 604 005	 701 005
 706 004	 4001 036	 4002 006	 4146 004	 ☆ 4225 012	 ☆ 4242 044	 4259 004	 4270 012

011 541 U.C.C. 384



 012 354	 012 417	 012 443	 012 444	 012 752	 012 775	 012 776	 017 074	 017 079	 017 503
 017 714	 017 924	$\frac{3}{1}$							

☆⇨ Please see remarks on the next page.

Calibre No.		Jewels	Style Name	
43A		2j		
PART NO.	PART NAME	PART NO.	PART NAME	
131 060	Third wheel bridge	4002 006	Coil block	
154 002	Fifth wheel bridge	4146 004	Step rotor	
☆194 004	Holding ring for movement	☆4225 012	Holding spring for battery	
231 026	Third wheel & pinion	☆4242 044	Plus terminal of battery connection	
241 032	Fourth wheel & pinion	4259 004	Back plate (anti-magnetic)	
261 221	Minute wheel	4270 012	Battery connection	
270 005	Center minute wheel (1.95 mm)	011 541	Upper hole jewel for step rotor	
270 008	Center minute wheel (2.25 mm)	011 541	Lower hole jewel for step rotor	
270 014	Center minute wheel (3.10 mm)	012 354	Setting lever spring screw	
271 028	Hour wheel (1.18 mm)	012 417	Third wheel bridge screw	
271 029	Hour wheel (1.45 mm)	012 443	Circuit block screw A	
271 032	Hour wheel (2.30 mm)	012 444	Minute wheel bridge screw	
281 009	Setting wheel	012 752	Fifth wheel bridge screw	
282 028	Clutch wheel	012 775	Circuit block screw B	
354 042	Winding stem (12.72 mm)	012 776	Back plate (anti-magnetic) screw	
354 044	Winding stem (17.72 mm)	017 074	Stopper tube for circuit block	
372 004	Joint stem (movement portion)	017 079	Tube for circuit block screw	
373 250	Joint stem (case portion)	017 503	Spacer for circuit block	
☆383 028	Setting lever	017 714	Lower bush for fifth wheel	
☆383 029		017 924	Eccentric dial pin	
384 014	Yoke (Clutch lever)	U.C.C.384	Silver oxide battery	
385 007	Yoke spring (Clutch lever spring)			
388 014	Setting lever spring			
391 011	Second-setting lever			
397 017	Lever for unlocking stem			
604 005	Minute wheel bridge			
701 005	Fifth wheel			
706 004	Sixth wheel & pinion			
4001 036	Circuit block			

Remarks :

Holding ring for movement

The type of a holding ring for movement is determined based on the design of cases and dials. Check the case number and refer to "SEIKO Quartz Casing Parts List" to choose an appropriate holding ring for movement.

Setting lever

☆383 028, 383 029.....There are two types of setting levers. Select the suitable setting lever by referring to the shapes in the lower diagram.

If the combination of the setting lever and case is unknown, check the case number and refer to "SEIKO Quartz Casing Parts List" to choose an appropriate setting lever.



☆383 028



☆383 029

Holding spring for battery

☆4225 012Used only for case without battery hatch.

Plus terminal of battery connection

☆4242 044.....Used only for case with battery hatch.

☆⇔ Please see remarks.

Part numbers in light letters are not shown in photos.