


Calibre No.	7810A	Jewels	5j	Style Name	
-------------	--------------	--------	-----------	------------	--

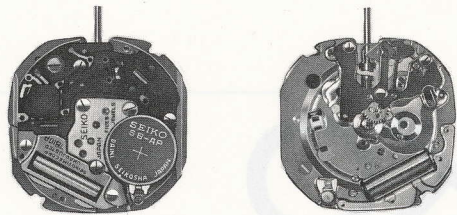

Characteristics

Casing diameter : ϕ 23.3 mm
 Maximum height : 2.9 mm
 Frequency of quartz crystal oscillator : 32,768 Hz

(Hz=Hertz Cycle per second)
 Driving system : Step motor system (2 poles)
 Regulation system : Trimmer condenser
 Second setting device
 Battery life indicator : Second hand moves in two-second interval.



122 781



131 781



221 781



225 781



231 781



241 781



261 781



271 781



281 589



282 781



354 780



383 780



384 781



386 781



390 780



391 781




399 780




491 589



701 781



☆884 682



4001 781



4002 781



4146 781



4216 781



4242 780



4259 770



SEIKO SB-AP



022 426



022 468



022 491



022 764



027 492

2/1

Calibre No.	7810A	Jewels	5j	Style Name
-------------	--------------	--------	-----------	------------

PART NO.	PART NAME	PART NO.	PART NAME
122 781	Center wheel bridge		
131 781	Third wheel bridge		
221 781	Center wheel & pinion		
225 781	Cannon pinion		
231 781	Third wheel & pinion		
241 781	Fourth wheel & pinion		
261 781	Minute wheel		
271 781	Hour wheel		
281 589	Setting wheel		
282 781	Clutch wheel		
354 780	Winding stem		
383 780	Setting lever		
384 781	Yoke (Clutch lever)		
386 781	Setting lever spring		
390 780	Setting lever axle		
391 781	Second-setting lever		
399 780	Casing clamp		
491 589	Dial washer		
701 781	Fifth wheel & pinion		
☆884 682	Holding ring for dial		
4001 781	Circuit block		
4002 781	Coil block		
4146 781	Step rotor		
4216 781	Insulator for battery connection		
4242 780	Plus terminal of battery connection		
4259 770	Anti-magnetic shield plate		
022 426	Casing clamp screw		
022 468	Center wheel bridge screw		
022 468	Third wheel bridge screw		
022 468	Anti-magnetic shield plate screw		
022 468	Circuit block screw		
022 491	Setting lever spring screw		
022 764	Dial screw		
027 492	Pin for plus terminal of battery connection		
011 324	Upper hole jewel for fifth wheel		
011 324	Lower hole jewel for fifth wheel		
011 404	Upper hole jewel for fourth wheel		
011 537	Upper hole jewel for step rotor		
011 537	Lower hole jewel for step rotor		
SEIKO SB-AP	Silver oxide battery		

Remarks :

Holding ring for dial

☆884 682.....The type of holding ring for dial is determined based on the design of cases and dials. Check the case number and refer to "SEIKO Quartz Casing Parts List" to choose a corresponding holding ring for dial.